

P3.91mm



KLEDZ.COM

OUTDOOR NOVASTAR

- Back Service
- Turn-key solution.
- Easy installation.
- Ground support compatible (sold separately here)
- Technical support available.
- 3 years warranty included for all parts.
- USA based.
- In stock. Ships immediately.

TECHNICAL SPECIFICATIONS

PIXEL PITCH	P3.91mm
LED ENCAPSULATION	NationStar Lamps SMD2121
PIXEL DENSITY	128 x 128
SIZE	500 x 500 x 75mm / 19.7" x 19.7" x 3"
CHIP	IC2153
HIGH REFRESH RATE	3840 hz
WEIGHT	16lbs / 8 Kg
RECEIVING CARD	Novastar

POWER SUPPLY

OPERATION POWER	100~240V 50-60Hz
MAX. POWER CONSUMPTION	160W/per panel
AVE. POWER CONSUMPTION	80W/per panel
CONNECTIONS POWER/DATA	Power-PowerCon In/Out; Data EtherCon In/Out

OPTICAL RATINGS

BRIGHTNESS	4500 NITS
PROTECTION RATE	IP65
SCAN	1/16
FRAME FREQUENCY	60 Hz
VIEW ANGLE	Horizontal 140°/Vertical 140°
OPTIMAL VIEW DISTANCE	8 ft (2,4m)
BRIGHTNESS ADJUSTMENT	0~100% 100 Levels

P3.91 mm




KLEDZ.COM


OUTDOOR NOVASTAR

FRONT SIZES


3

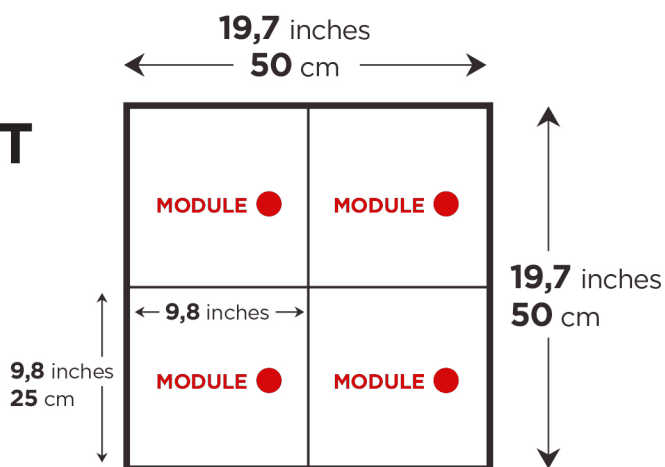

SIDE SIZES

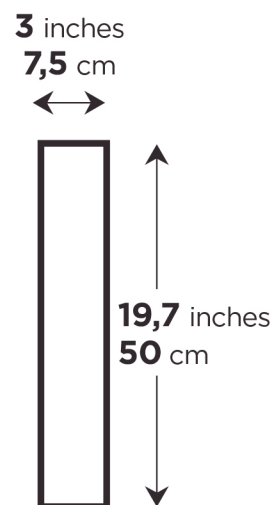

VIEWING DISTANCE

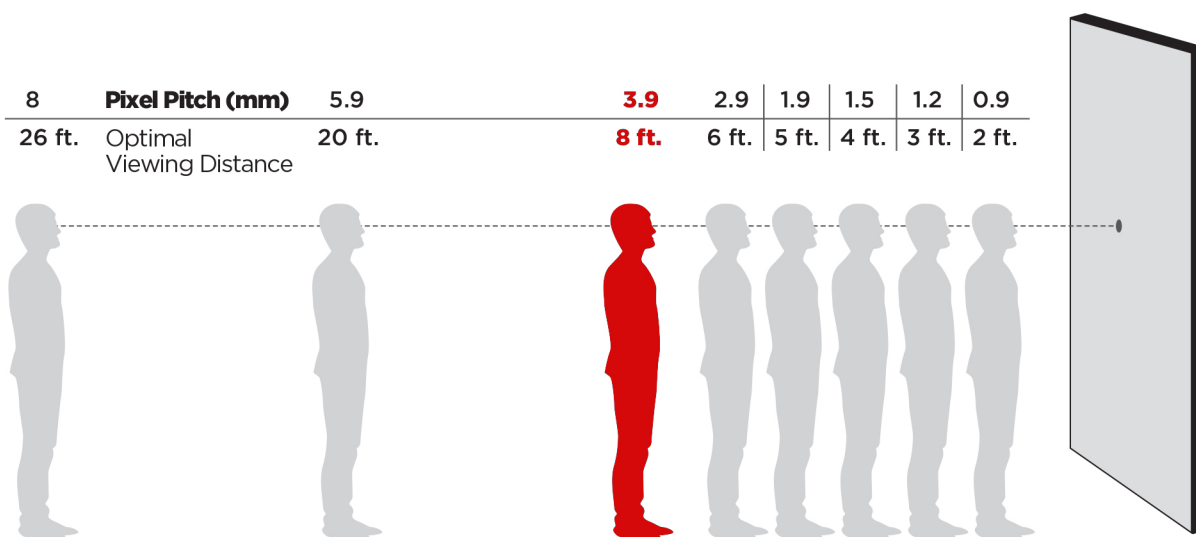

P3.91 mm

OUTDOOR NOVASTAR



KLEDZ.COM

BACK
DESIGN



LED
FRONT