

# P3.91mm



KLEDZ.COM

## OUTDOOR **NOVASTAR**

- Front Service - Back Service
- Turn-key solution.
- Easy installation.
- Ground support compatible (sold separately here)
- Technical support available.
- 3 years warranty included for all parts.
- USA based.
- In stock. Ships immediately.

### TECHNICAL SPECIFICATIONS

PIXEL PITCH	P3.91mm
LED ENCAPSULATION	King-Light SMD2121
PIXEL DENSITY	128 x 256
SIZE	500 x 1000 x 75mm / 19.7" x 39.37" x 3"
CHIP	IC2153
HIGH REFRESH RATE	3840 hz
WEIGHT	32 lbs / 16 Kg
RECEIVING CARD	Novastar

### POWER SUPPLY

OPERATION POWER	100~240V 50-60Hz
MAX. POWER CONSUMPTION	320W/per panel
AVE. POWER CONSUMPTION	160W/per panel
CONNECTIONS POWER/DATA	Power-PowerCon In/Out; Data EtherCon In/Out

### OPTICAL RATINGS

BRIGHTNESS	1500 NITS
PROTECTION RATE	IP45
SCAN	1/16
FRAME FREQUENCY	60 Hz
VIEW ANGLE	Horizontal 140° / Vertical 140°
OPTIMAL VIEW DISTANCE	8 ft (2,4m)
BRIGHTNESS ADJUSTMENT	0~100% 100 Levels


# P3.91 mm




KLEDZ.COM

## OUTDOOR NOVASTAR

### FRONT SIZES

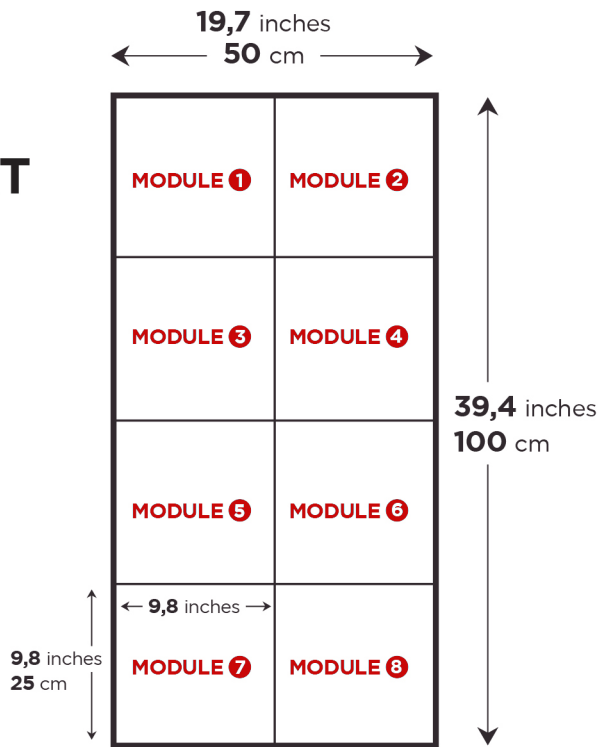


### SIDE SIZES

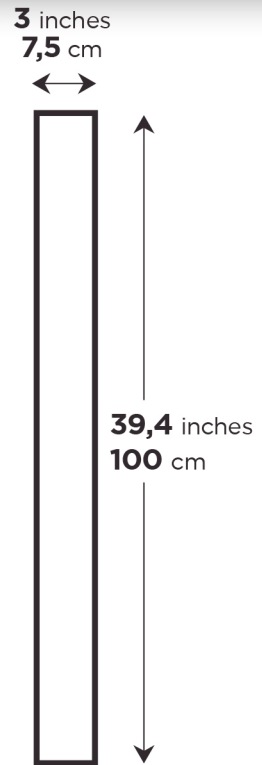

## VIEWING DISTANCE

8	Pixel Pitch (mm)	5.9	3.9	2.9	1.9	1.5	1.2	0.9
26 ft.	Optimal Viewing Distance	20 ft.	8 ft.	6 ft.	5 ft.	4 ft.	3 ft.	2 ft.

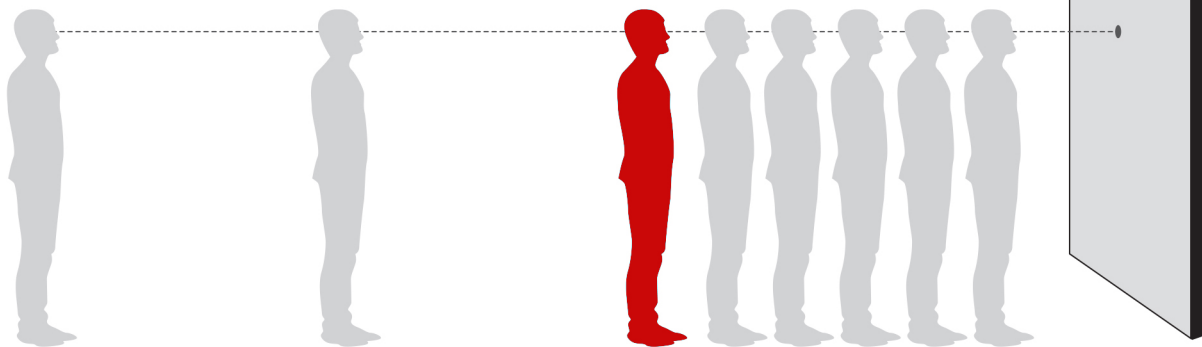

# P3.91 mm

## OUTDOOR NOVASTAR



KLEDZ.COM

